

Model Shown:

FLS15, FLS15-ST




Features


INTEGRATED WEDGE CONCEPT IDEAL FOR CREATING SPACE FOR FLANGE SURFACE CLEANING AND REPAIR

- 15 Metric Ton wedge-driven spreader. Jaws fully supported by wedge for excellent durability.
- Low friction provided by heavy-duty extended-life lubricant, ideal for flanges with narrow gaps (only 5 mm required for entry).
- Compact and lightweight design (only 252 mm long at a weight of 3,2 kg).
- Ergonomically balanced handle included.
- Suitable for the offshore environment due to superior corrosion resistance
- Quick adjustments for various tasks due to interchangeable shoes (both stepped and serrated)
- Easy and quick maintenance without special tools required.
- Includes female half coupler & mates to standard 3/8" male half coupler (9798).

FLS15 Spreader



FLS15-ST Spreader

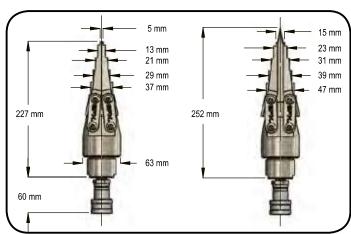

ly CLOSED	Fully OPENED	Fully CLOSED	Fully OPENED

Order No.	Maximum Spreading Force	Minimum Tip Clearance	Maximum Tip Spread	Spreader Type	Oil Cap.	Maximum Operating Pressure	Prod. Weight
		(mm)	(mm)		(cm³)	(bar)	(kg)
FLS15 FLS15–ST	15 ton	5	10 mm pro hub	Hydraulic	16	700	3,2





Features

TYPICAL APPLICATIONS:

- Pipe and flange repair
- Removing elbows
- Couplers & gasket and metal seal replacement
- Heavy equipment maintenance

OTHER OPTIONAL ACCESSORIES

HANDLE	
	Order No.
	2008410

Order No. Description

Lightweight spreaders handle is designed for use with FLS15 or FLS15-ST. Wt., 55 g.

STEPPED BLOCK			
	Order No.	Description	
	SB15	Use to increase the wedge opening. Designed to use with FLS15 or FLS15-ST. (1 piece).	



Order No. Description

Lightweight spreader stepped shoe with an interlocking friction-free smooth, parallel wedge design, Wt. 290 g.






Order No.	Descriptio

Two-speed, single-acting hand pump . 0,5 I oil capacity. Wt. 2,3 kg.



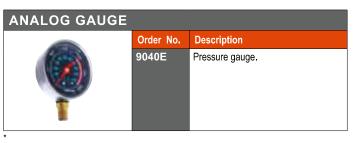

COUPLER & GAUGE ADAPTER			
	Order No.	Description	
	9798	Male half coupler.	
	9670	Gauge adapter	

powerteam.com 210