


Model Shown:
CC10



Features

- In 5, 10 and 25 ton capacities. For use with Power Team general purpose single-acting series cylinders of comparable capacity.
- For clamping, pressing and bending. Ideal for welding and metal fabrication for fit-up of sheet or plate steel.
- Clamps withstand full rated capacity of the cylinders for which they are intended.

Note: To minimize the effects of off-center loading, the CC5, CC10 and CC25 should be used with the optional 350144 and 350145 swivel caps.

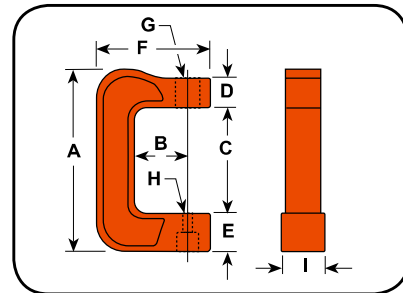

Ordering Information

Order No.	Cap. (ton)	A	B	C	D	E	F	G	H	I	Use With Cyl. No.	Prod. Wt. (kg)
		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(in.)	(mm)	(mm)		
CC5	5	314,0	95,3	186,0	50,8	63,5	197,0	1 1/2" - 16 UN	22,2	76,2	C51C-C57C	11,3
CC10	10	403,0	152,4	240,0	50,8	85,8	273,0	2 1/4" - 14 UNS	22,2	88,9	C101C-C1010C	20,9
CC25	25	533,0	152,4	319,0	76,2	117,3	313,0	3 5/16" - 12 UNS	36,5	117,5	C251C-C2514C	41,3

OTHER OPTIONAL ACCESSORIES WITH CC5, CC10 & CC25 HYDRAULIC CLAMPS

SWIVEL CAPS

	Order No.	Cap. (ton)	A (mm)	B (mm)
	350144 *	5 - 10	35,0	19,0
	350145	25	50,8	25,4

PUSHING ADAPTERS

	Order No.	Cap. (ton)	A (mm)	B (in.)	C (mm)
	28228**	10	60,3	1 - 8	38,1
	28229**	25	73,0	1 1/4 - 7	44,5

THREADED ADAPTERS

	Order No.	Cap. (ton)	A (in.)	B (in.)	C (mm)	D (mm)
	38597	10	1 - 8	1 - 8	19,0	50,8
	38953	25	1.5-16	1 1/4 - 7	70,0	111,0

PUSHING ADAPTERS

	Order No.	Cap. (ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (in.)
	201923**	10	79,4	57,2	136,5	12,7	1 - 8
	34510**	25	82,6	66,7	149,0	19,0	1 1/4 - 7

V PUSHING ADAPTERS

	Order No.	Cap. (ton)	A (mm)	B (in.)	C (mm)	D (mm)
	34806**	10	66,7	1 - 8	38,1	25,4
	34807**	25	79,4	1 1/4 - 7	44,5	31,8

PUSHING ADAPTERS

	Order No.	Cap. (ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (in.)
	201454**	10	79,4	57,2	137,0	19,0	1 - 8
	34511**	25	82,6	66,7	149,0	25,4	1 1/4 - 7

* May be used with CC5

** Must be used with a threaded adapter.

PUSHING ADAPTERS

	Order No.	Cap. (ton)	A (mm)	B (mm)	C (mm)
	309874*	5	51,6	562,8	15,9