


Model Shown:
RWP55-4

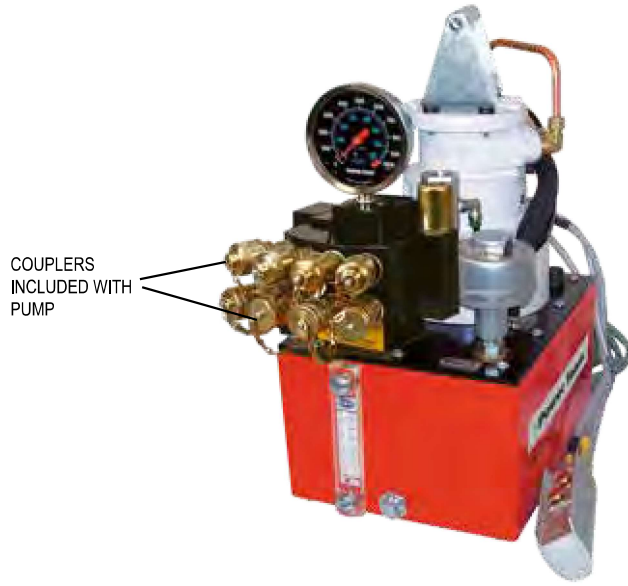

Features

AIR HYDRAULIC TORQUE WRENCH PUMP


- Use where air is the preferred source of power.
- Powerful 2,2 Kw motor starts under load.
- External adjustable pressure regulator.
- Retract side internal relief valve protects tools.
- Use for single or double-acting tools.
- Four-tool manifold allows use of up to four tools simultaneously.
- 7,6 m. pneumatic remote controller included.



CAUTION

THIS PUMP SHOULD NOT BE USED FOR LIFTING APPLICATIONS, IT'S DESIGN FOR TORQUE WRENCH APPLICATIONS ONLY.

Tools

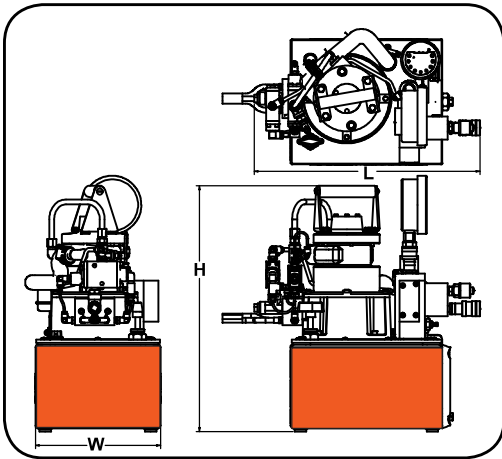

Ordering Information

Order No.	Width (mm)	Length (mm)	Height (mm)	Air Motor	Oil Delivery (l/min.)	Oil Reservoir Cap. (l)	Usable Oil (l)	Prod. Wt. (kg)
RWP55	450	280	483	2,25 Kw, 1,4 m ³ @ 6 bar	7,6 @ 7 Bar 0,9 @ 700 Bar	9,5	8,4	44
RWP55-4 (4-TOOL MANIFOLD)	450	280	483	2,25 Kw, 1,4 m ³ @ 6 bar	7,6 @ 7 Bar 0,9 @ 700 Bar	9,5	8,4	44